PSE30WG-B

30W, IEEE802.3at Single Port PoE Active Injectors

SDaPo®



Feathers:

- IEEE802.3af/at Compliant
- PoE Pin:1,2+/3,6- (Mode A)
- Power:30 Watts Maximum
- Input Voltage: 100~240VAC
- Output Voltage: 54VDC
- Support 1Gbps/2.5Gbps
- PoE data & power transmission distance 100meter
- Full Over-Voltage and Over-Current Protection;
- Compact size
- 1-Year warranty

Mechanical Characteristics:

- Length: 140.5mm(5.53inch)
- Width:45.5mm(1.79inch)
- Height:30.5mm(1.20inch)
- Weight:137g(4.83oz)


Output Specifications:

Model	Data speed	DC output voltage	Load		Regulation	
			Min.	Max.	Line	Load
PSE30WG-B	1Gbps/2.5gbps	54V	10mA	600mA	54V~57V	

Applications:

- IP Telephones
- Wireless Access Points
- Bluetooth Access Points
- Security Cameras
- IP Point Servers
- WiMAX Access Points

Dimensional Diagram: (Unit: mm)

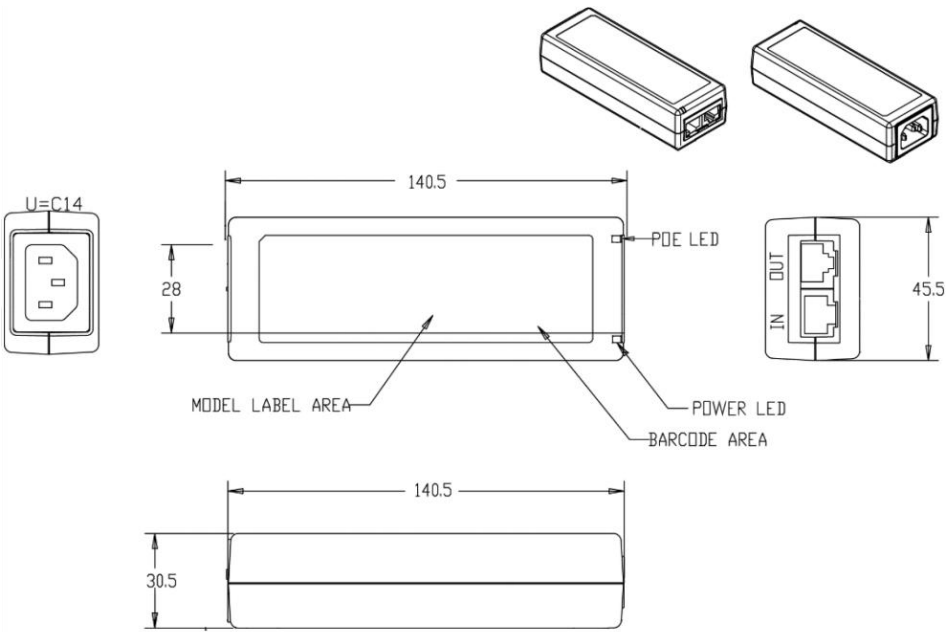

Wiring Diagram:

